

#### ELECRICAL CHARANTERISTICS

| Nominal Capacity  | 0.8Ah      |
|---|------------|
| (2mA,+25 $^\circ\!\mathrm{C}$ 2V cut off.The capacity restored by | y the      |
| cell varies according to current drain, temperature and cut-off)  |            |
| Nominal Voltage   | 3.60V      |
| Max.Continuous Current  | 15mA       |
| Max.Pulse Capability  | 25mA       |
| Storage(recommended)  | Max.30℃    |
| (For more severe conditions,consult Ramway)                       |            |
| Operating Temperature Range - 6                                   | 60℃~+85℃   |
| (Operation at temperature different from ambient may lead to      |            |
| reduced capacity and lower voltage plateau readings)              |            |
| Weight A  | pprox.9.5g |




# **KEY FEATURESAPPLICATION**

- High and stable operating voltage
- Low self discharge rate(less than 1% after 1 year of storage at 25°C)
- Long storage life
- Stainless steel container(with low magnet)
- Widely operating temperature range
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte


 $\succ$ Utility metering Memory back-up  $\succ$ Alarms and security devices  $\triangleright$ Tollgate systems  $\succ$ Military electronics  $\triangleright$ Automotive electronics  $\triangleright$ Professional electronics GPS tracking > $\triangleright$ Real time clock




#### DISCHARGE CHARACTERISTICS (+25℃)

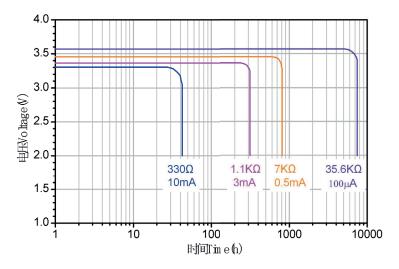


#### **VOLTAGE VERSUS TEMPERATURE**

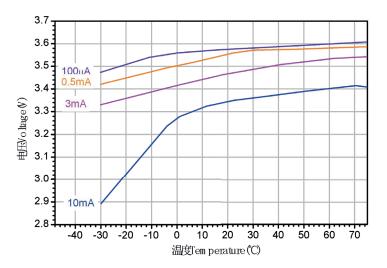

### CAPACITY VERSUS CURRENT

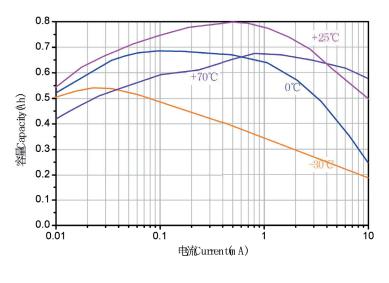

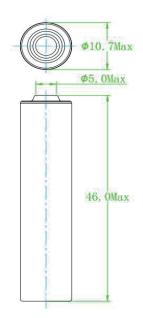

## WARNING

- It is strictly forbidden to have the battery positive and negative short circuit, charging, discharging, heating over 100 °C, remove, anatomy, or may cause explosion, combustion, internal acid leakage.
- Do not solder directly on the battery, should usewire or nickel sheet by pre spot welded.
- Can not mixed use with old and new battery or mixed use different kinds battery.
- Don't assemble the batteries from different manufacturers.
- Do not use the battery exceed the temperature range.
- Discharged battery should be buried deeply in the ground.

energy inside GmbH • Ludwig-Elsbett-Straße 8 • 97616 Salz • Germany

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.