


Data Sheet

Recommended Application: Photo

6203

Type Designation	2CR5
Designation IEC	2CR5
System	Li-MnO ₂
Shelf Life *	10 years
Nominal Voltage [V]	6
Typical Capacity C [mAh]	1600 (Load 390 Ω at 20° C down to 3.6V)
Permissible Temperature Range	- 20 °C ... 70 °C
Weight, approx. [g]	42
Volume [ccm]	23

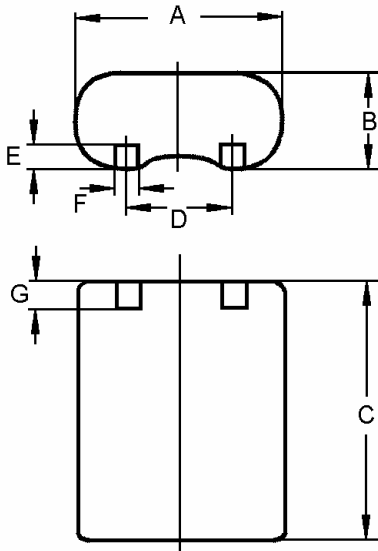

Dimensions [mm]

min: max:

A	32.5	34.0
B	16.0	17.0
C	43.0	45.0
D	15.7	16.3
E	3.5	4.5
F	3.5	4.6
G	3.5	4.5

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	4.0	3.6
Pulse Test 15s/m, 7d/w	7.5 Ω	Time [cy]	480	505
		Capacity [Ah]	1.35	1.41
		Energy [Wh]	7.04	7.23
Discharge Type	Load	End Voltage[V]	4.0	3.6
Service Output Test 24h/d, 7d/w	390 Ω	Time [h]	113	114
		Capacity [Ah]	1.61	1.62
		Energy [Wh]	9.15	9.20

* In consideration of typical loss of capacity at storage and application.