


# Data Sheet

Recommended Application: Photo

# 6206

Type Designation	CR 2
Designation IEC	CR 17355
System	Li-MnO <sub>2</sub>
Shelf Life *	10 years
Nominal Voltage [V]	3
Typical Capacity C [mAh]	920 (Load 100 Ω at 20° C down to 1.8V)
Permissible Temperature Range	- 20 °C ... 70 °C
Weight, approx. [g]	11
Volume [ccm]	5
Dimensions [mm]	min: max:

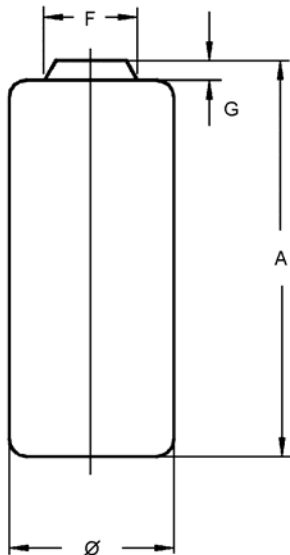

Ø	15.1	15.6
A	26.3	27.0
F	6.2	6.4
G	0.7	1.2

## Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	2.0	1.55
Pulse Test 3S / 30S, 24H / D	900 mA	Time [cy]	800	880
		Capacity [Ah]	0.62	0.63
		Energy [Wh]	1.44	1.56
Discharge Type	Load	End Voltage[V]	2.2	2.0
Service Output Test 24h/d,	100 Ω	Time [h]	29,3	30,2
		Capacity [Ah]	0,80	0.82
		Energy [Wh]	2.20	2.22

\* In consideration of typical loss of capacity at storage and application.