XCELL XP 7-12
12V 7AH (20 HOUR)




General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and Weight

Length(mm / inch)	151 / 5.94
Width(mm / inch)	65 / 2.56
Height(mm / inch)	93.5 / 3.68
Total Height(mm / inch)	100 / 3.94
Approx. Weight(Kg / lbs)	2.43 / 5.36

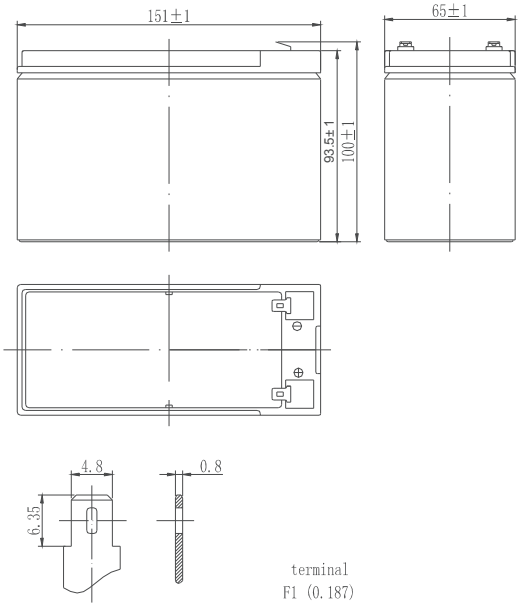

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	3~5 years
Nominal Capacity 77ºF(25ºC)	
20 hour rate (0.35A, 10.5V)	7Ah
10 hour rate (0.68A, 10.5V)	6.8Ah
5 hour rate (1.13A, 10.5V)	5.65Ah
1 hour rate (4.56A, 9.6V)	4.56Ah
Internal Resistance	
Fully Charged battery 77ºF(25ºC)	28mOhms
Self-Discharge	
3% of capacity declined per month at 20ºC(average)	
Operating Temperature Range	
Discharge	-20~60ºC
Charge	-10~60ºC
Storage	-20~60ºC
Max. Discharge Current 77ºF(25ºC)	105A(5s)
Short Circuit Current	350A
Charge Methods: Constant Voltage Charge 77ºF(25ºC)	
Cycle use	14.5-14.9V
Maximum charging current	2.8A
Temperature compensation	-30mV/ºC
Standby use	13.6-13.8V
Temperature compensation	-20mV/ºC

Discharge Constant Current (Amperes at 77ºF25ºC)

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	29.1	18.4	14.8	8.30	4.56	1.84	1.26	0.70	0.363
1.65V	27.5	17.5	14.2	7.90	4.40	1.80	1.22	0.69	0.359
1.70V	26.0	16.7	13.6	7.62	4.22	1.74	1.17	0.69	0.355
1.75V	24.4	15.7	13.0	7.24	4.04	1.68	1.13	0.68	0.350
1.80V	22.8	14.8	12.4	7.03	3.84	1.63	1.08	0.66	0.344

Discharge Constant Power (Watts at 77ºF25ºC)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	52.0	35.1	27.5	15.2	11.50	8.97	5.06	3.59	2.33
1.65V	49.4	33.3	26.5	14.6	11.00	8.59	4.94	3.50	2.29
1.70V	46.9	31.6	25.4	14.0	10.50	8.23	4.80	3.40	2.25
1.75V	44.5	29.8	24.3	13.4	10.10	7.99	4.65	3.30	2.21
1.80V	41.6	28.0	23.3	12.9	9.75	7.62	4.50	3.19	2.15


(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the mimimum values.

VdS G 116061 XCell


NCP ISO9001 VdS PG CE CE 1188 MH 29410

XCELL XP 7-12
12V 7AH (20 HOUR)


Discharge characteristic (25°C)

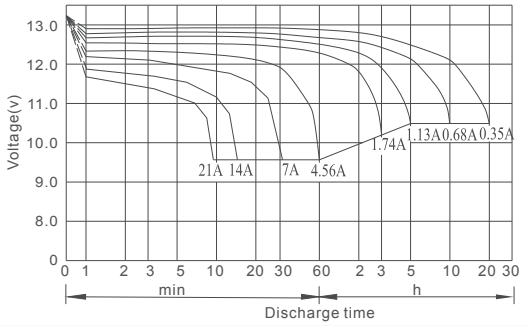


Constant voltage charging characteristic (0.25CA,25°C)

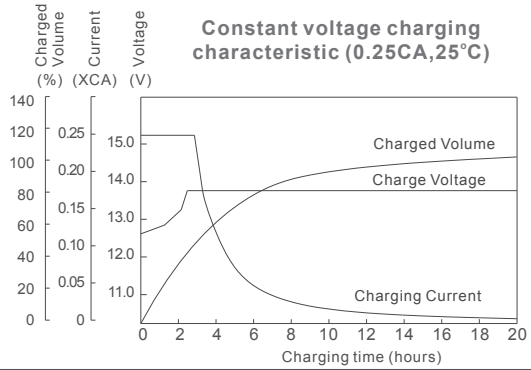


Relationship between charging voltage and temperature

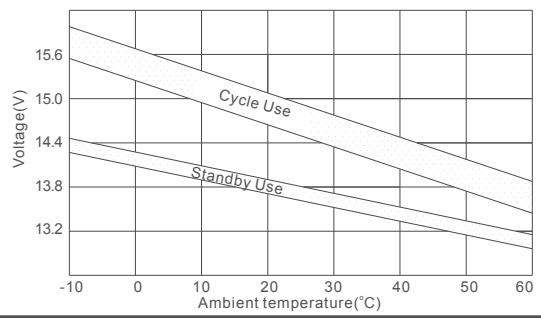


Self-discharge characteristic

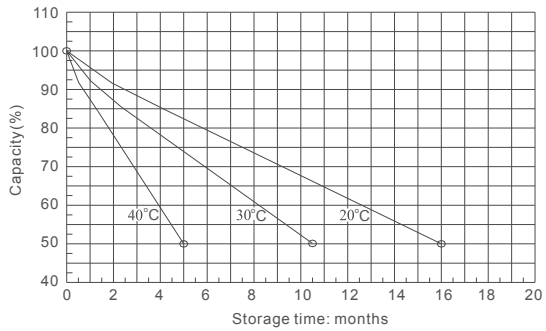


Life characteristics of Standby use

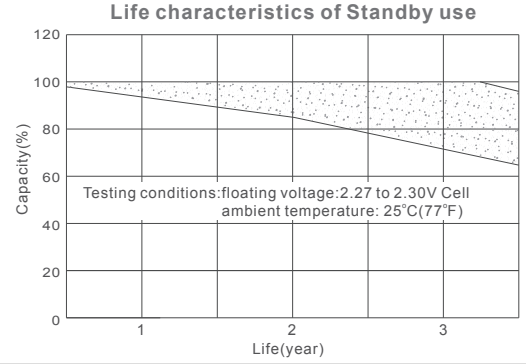

Cycle service life in relation to depth of discharge

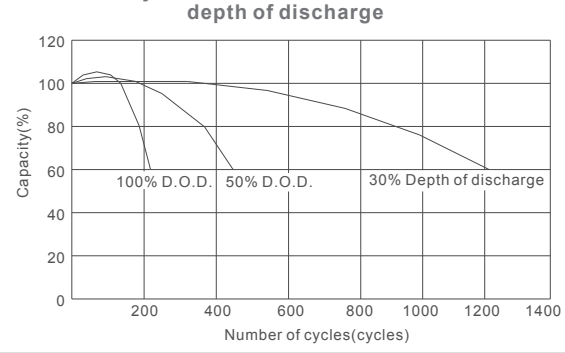

Temperature effects on float life

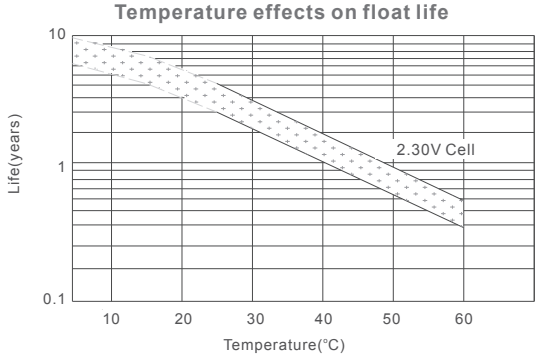

Temperature effects on capacity

