


Data Sheet


CR1616

Nominal Voltage	3 V	Dimensions (mm) 
Nominal Capacity	50 mAh	
Standard Load	30 KΩ	
Standard Current	0.1 mA	
Max. Continuous Current	0.65 mA	
Max Pulse Current	8 mA	
Operating Temperature	-20~60°C	
Weight	1.05 (g)	
Chemistry	Lithium / Manganese Dioxide	
UL Certification	MH10136	


A	Φ13.73 ^{+0.01} ₋₀
B	Φ16.00 ⁺⁰ _{-0.15}
C	1.33 ^{+0.02} _{-0.02}
D	1.6 ⁺⁰ _{-0.2}

Note: Capacity 50mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

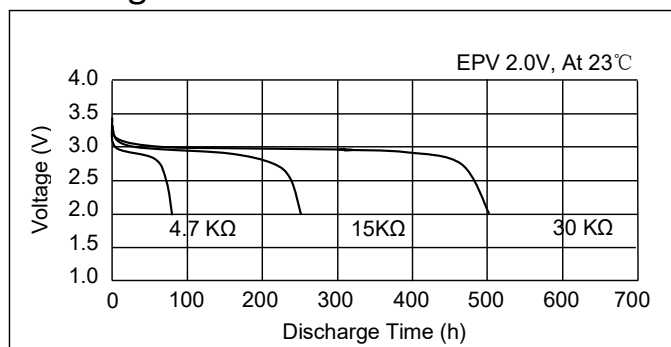

Temperature Characteristics

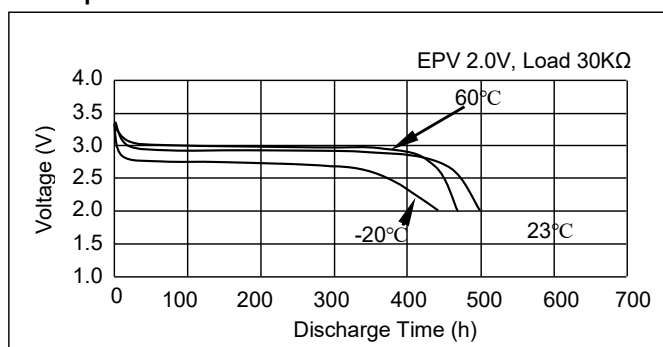

Pulse Discharge Characteristics

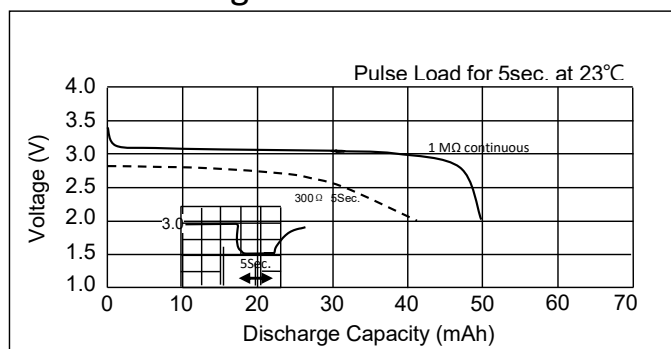

Load vs. Capacity

