



Data Sheet

CR2477


Nominal Voltage	3 V	Dimensions (mm) 								
Nominal Capacity	950 mAh									
Standard Load	7.5 KΩ									
Standard Current	0.4 mA									
Max. Continuous Current	2 mA									
Max Pulse Current	15 mA									
Operating Temperature	-20~60℃									
Weight	8.8 (g)	<table><tr><td>A</td><td>Φ21.87⁺⁰_{-0.04}</td></tr><tr><td>B</td><td>Φ24.50⁺⁰_{-0.15}</td></tr><tr><td>C</td><td>6.55⁺⁰_{-0.05}</td></tr><tr><td>D</td><td>7.70⁺⁰_{-0.2}</td></tr></table>	A	Φ21.87 ⁺⁰ _{-0.04}	B	Φ24.50 ⁺⁰ _{-0.15}	C	6.55 ⁺⁰ _{-0.05}	D	7.70 ⁺⁰ _{-0.2}
A	Φ21.87 ⁺⁰ _{-0.04}									
B	Φ24.50 ⁺⁰ _{-0.15}									
C	6.55 ⁺⁰ _{-0.05}									
D	7.70 ⁺⁰ _{-0.2}									
Chemistry	Lithium / Manganese Dioxide									
UL Certification	MH10136									

Note: Capacity is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

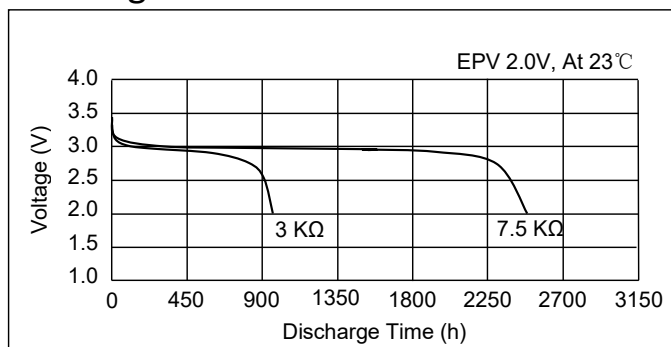

Temperature Characteristics

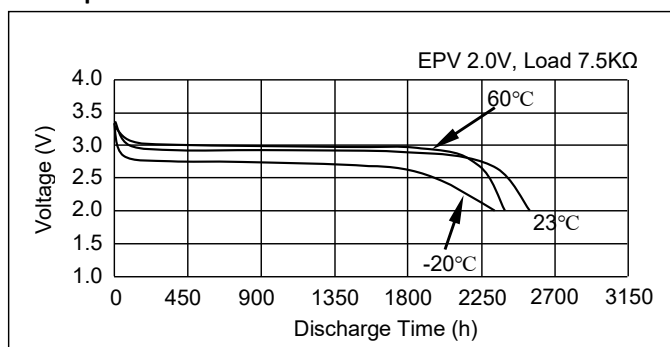

Pulse Discharge Characteristics

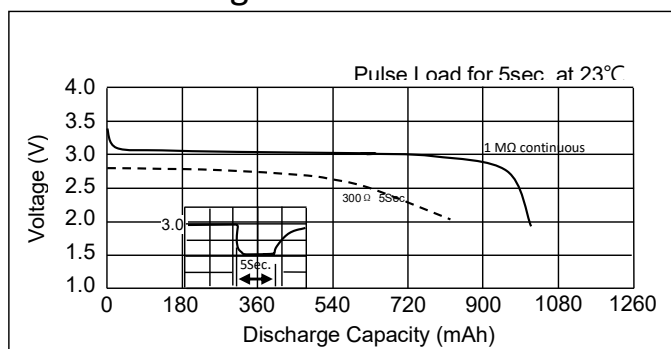

Load vs. Capacity

