



Data Sheet

CR1130


Nominal Voltage	3 V	Dimensions (mm) 								
Nominal Capacity	48 mAh									
Standard Load	68 KΩ									
Standard Current	0.1 mA									
Max Pulse Current	5 mA									
Operating Temperature	-20~60℃									
Weight	0.86 (g)									
Chemistry	Lithium / Manganese Dioxide	<table><tr><td>A</td><td>Φ9.64⁺⁰_{-0.04}</td></tr><tr><td>B</td><td>Φ11.6⁺⁰_{-0.10}</td></tr><tr><td>C</td><td>2.45⁺⁰_{-0.05}</td></tr><tr><td>D</td><td>3.0⁺⁰_{-0.2}</td></tr></table>	A	Φ9.64 ⁺⁰ _{-0.04}	B	Φ11.6 ⁺⁰ _{-0.10}	C	2.45 ⁺⁰ _{-0.05}	D	3.0 ⁺⁰ _{-0.2}
A	Φ9.64 ⁺⁰ _{-0.04}									
B	Φ11.6 ⁺⁰ _{-0.10}									
C	2.45 ⁺⁰ _{-0.05}									
D	3.0 ⁺⁰ _{-0.2}									
UL Certification	MH10136									

Note: Capacity 48mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

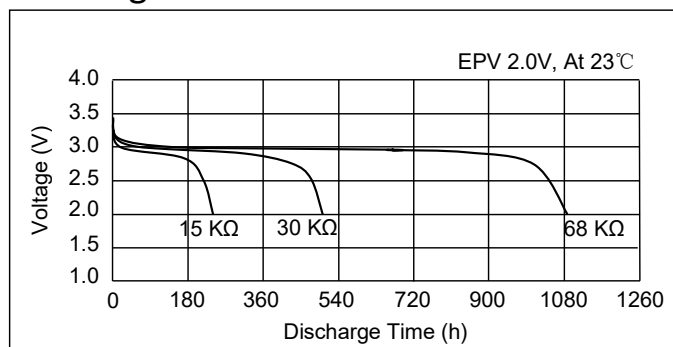

Temperature Characteristics

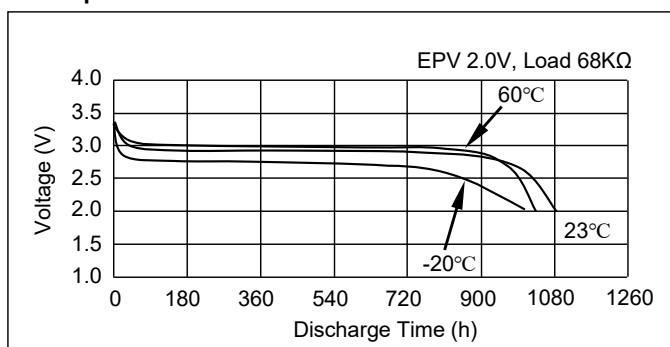

Pulse Discharge Characteristics

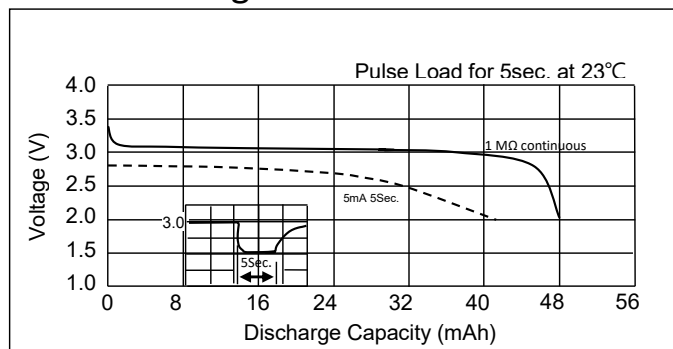

Load vs. Capacity

