



Data Sheet

CR1220


Nominal Voltage	3 V	Dimensions (mm)  <table><tr><td>A</td><td>$\Phi 10.67^{+0}_{-0.04}$</td></tr><tr><td>B</td><td>$\Phi 12.5^{+0}_{-0.15}$</td></tr><tr><td>C</td><td>$1.55^{+0}_{-0.05}$</td></tr><tr><td>D</td><td>$2.0^{+0}_{-0.2}$</td></tr></table>	A	$\Phi 10.67^{+0}_{-0.04}$	B	$\Phi 12.5^{+0}_{-0.15}$	C	$1.55^{+0}_{-0.05}$	D	$2.0^{+0}_{-0.2}$
A	$\Phi 10.67^{+0}_{-0.04}$									
B	$\Phi 12.5^{+0}_{-0.15}$									
C	$1.55^{+0}_{-0.05}$									
D	$2.0^{+0}_{-0.2}$									
Nominal Capacity	40 mAh									
Standard Load	62 K Ω									
Standard Current	0.05 mA									
Max Pulse Current	5 mA									
Operating Temperature	-20~60°C									
Weight	0.75 (g)									
Chemistry	Lithium / Manganese Dioxide									
UL Certification	MH10136									

Note: Capacity 40mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

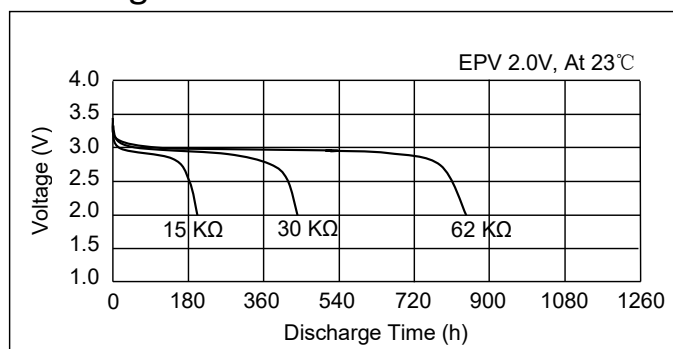

Temperature Characteristics

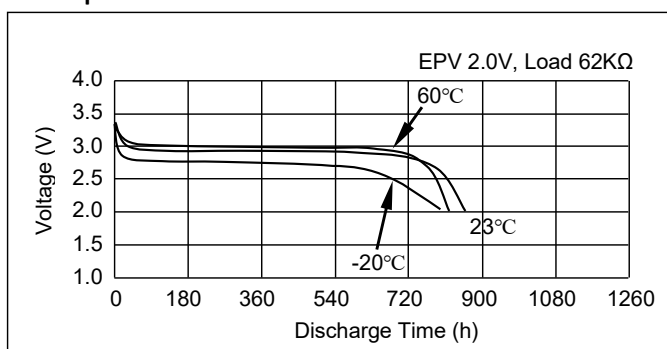

Pulse Discharge Characteristics

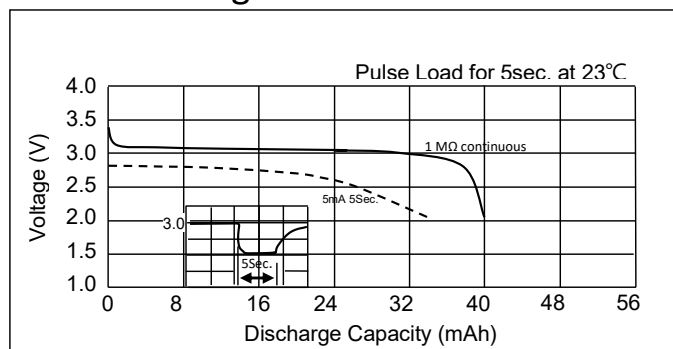

Load vs. Capacity

