

# RECHARGEABLE SEALED LEAD ACID BATTERY

# SPECIFICATION



## MPL12-12

**Nominal Voltage (V)** 12V

**Nominal Capacity**

20 hour rate	(0.6A to 10.50V)	12.00Ah
10 hour rate	(1.14A to 10.50V)	11.40Ah
5 hour rate	(2.04A to 10.20V)	10.20Ah
1 C	(12A to 9.60V)	7.60Ah
3 C	(36A to 9.60V)	4.80Ah

**Weight** 4.02kg (8.84lbs.)

**Internal Resistance (at 1KHz) Approx.** 11 mΩ

**Maximum Discharge Current for 5 seconds:** 180A

**Charging Methods at 25°C (77°F)**

Maximum Charging Current: 3.6A  
 Standby use:  
 Float Charging Voltage 13.50V to 13.80V  
 Coefficient -3.0mV/°C/cell

**Operating Temperature Range**

Charge -15°C (5°F) to 40°C (104°F)  
 Discharge -15°C (5°F) to 50°C (122°F)  
 Storage -15°C (5°F) to 40°C (104°F)



**Charge Retention (shelf life) at 20°C (68°F)**

1 month	92%
3 month	90%
6 month	80%

**Case Material** ABS UL94 HB


**Terminal** F2 (Faston Tab 250)

**Design Life**  
 Eurobat (20°C) : 10+ years

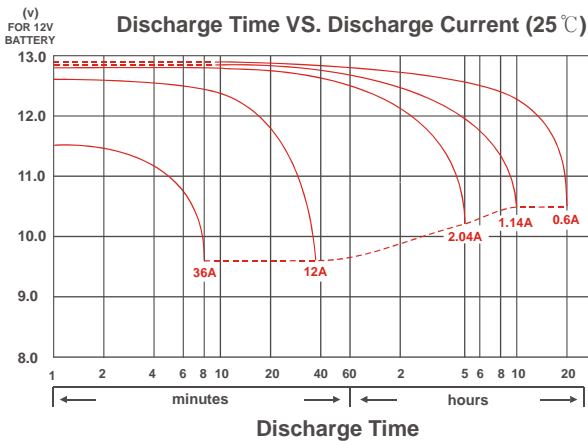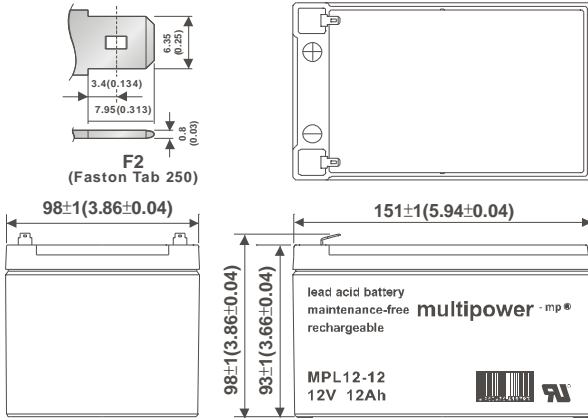


## CHARACTERISTIC & PERFORMANCE DATA


Effect of Temperature on Capacity 25°C(77°F)

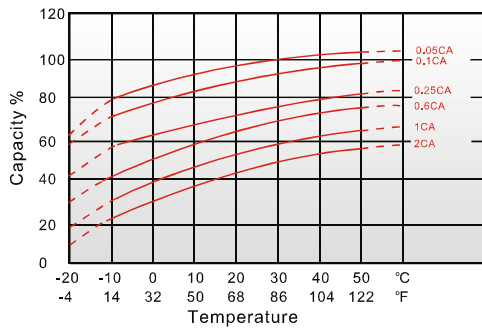

Capacity Retention Characteristic

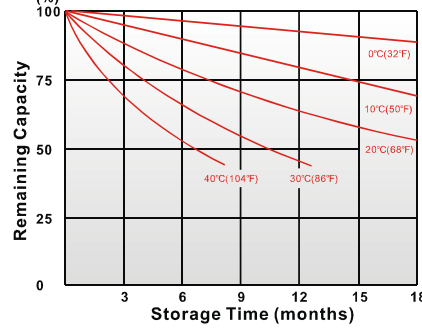

Trickle (or float) Service Life



### - PERFORMANCE DATA

Discharge Rates in Watts per Cell to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	77.2	84.2	89.3	94.8	97.3	99.7	105
10	min	56.5	60.3	63.0	65.3	66.2	67.5	68.8
15	min	42.2	45.3	47.2	48.5	49.2	49.8	51.0
30	min	26.7	28.0	29.0	30.0	30.3	30.7	31.2
60	min	14.9	15.9	16.6	17.2	17.3	17.5	17.7
120	min	7.80	8.60	9.02	9.22	9.28	9.38	9.52
180	min	5.40	6.15	6.53	6.68	6.97	7.10	7.20
240	min	4.43	4.97	5.22	5.37	5.43	5.52	5.62
300	min	4.12	4.35	4.51	4.65	4.72	4.77	4.83
600	min	2.43	2.55	2.62	2.66	2.68	2.70	2.72
1200	min	1.29	1.31	1.35	1.37	1.39	1.40	1.43

- Discharge Rates in Amperes per Battery to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	37.8	41.8	44.6	47.5	48.8	50.1	52.7
10	min	28.1	30.3	31.5	32.7	33.2	33.8	34.6
15	min	21.3	22.6	23.7	24.6	25.0	25.4	26.1
30	min	12.6	13.5	14.1	14.6	14.8	15.0	15.3
60	min	8.55	8.74	8.86	8.97	9.02	9.08	9.16
120	min	4.71	4.84	4.95	5.04	5.08	5.13	5.18
180	min	3.14	3.33	3.40	3.46	3.49	3.52	3.56
240	min	2.15	2.26	2.35	2.42	2.45	2.49	2.74
300	min	1.98	2.06	2.12	2.18	2.20	2.23	2.27
600	min	1.19	1.22	1.24	1.26	1.27	1.28	1.29
1200	min	0.619	0.626	0.645	0.654	0.661	0.669	0.683

All data on the spec. sheet is an average value:

The tolerance range :  $X < 6\text{min}$  (+15%~-15%),  $6\text{min} \leq X < 10\text{min}$  (+12%~-12%),  $10\text{min} \leq X < 60\text{min}$  (+8%~-8%),  $X \geq 60\text{min}$  (+5%~-5%)