




**RECHARGEABLE SEALED LEAD ACID BATTERY**

**SPECIFICATION**

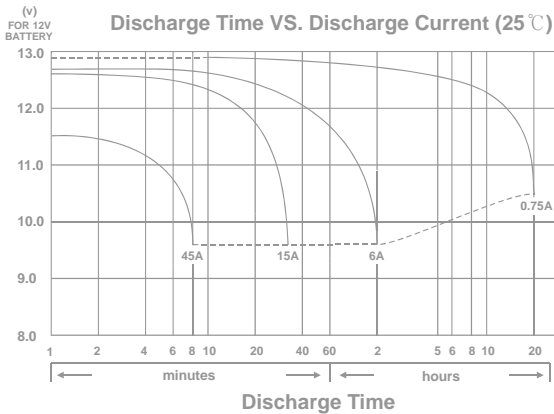

**F2**  
(Faston Tab 250)

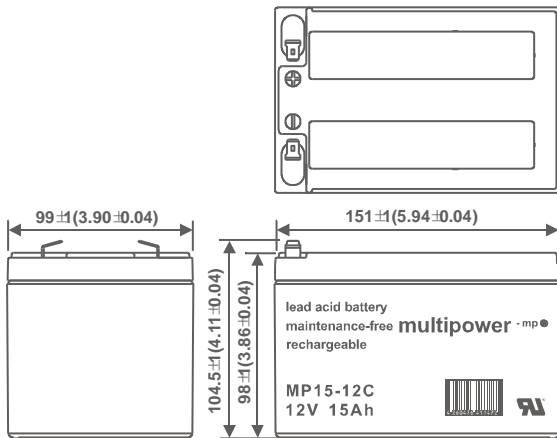

**MP15-12C**

**Nominal Voltage (V)** 12V

**Nominal Capacity**

20 hour rate	(0.75A to 10.50V)	15.00Ah
2 hour rate	(6A to 9.60V)	12.00Ah
1 C	(15A to 9.60V)	8.50Ah
3 C	(45A to 9.60V)	6.00Ah

**Weight Approx.** 4.5kg (9.9lbs)

**Internal Resistance (at 1KHz) Approx.** 9 mΩ

**Maximum Discharge Current for 5 seconds:** 225A

**Charging Methods at 25°C (77°F)**

Cycle use:  
 Charging Voltage 14.70V to 14.80V  
 Coefficient -5.0mV/°C/cell  
 Maximum Charging Current: 4.5A  
 Standby use:  
 Float Charging Voltage 13.50V to 13.80V  
 Coefficient -3.0mV/°C/cell

**Operating Temperature Range**

Charge -15°C (5°F) to 40°C (104°F)  
 Discharge -15°C (5°F) to 50°C (122°F)  
 Storage -15°C (5°F) to 40°C (104°F)

**Charge Retention (shelf life) at 20°C (68°F)**


1 month	92%
3 month	90%
6 month	80%

**Case Material** ABS  
(UL94 HB flame retardant case / cover)


**Terminal** F2

## CHARACTERISTIC & PERFORMANCE DATA


Effect of Temperature on Capacity 25°C (77°F)

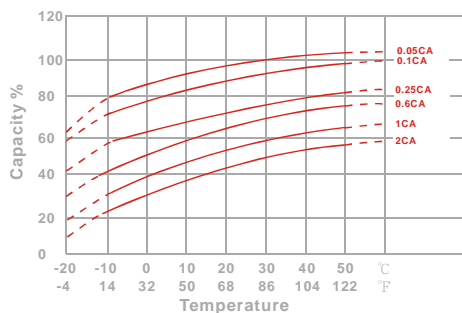


Capacity Retention Characteristic

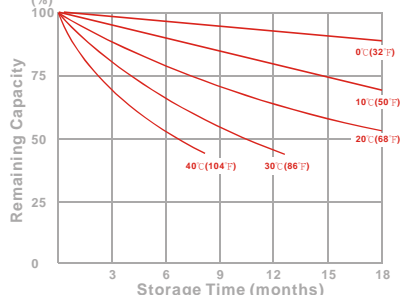

Trickle (or float) Service Life



Cycle Service Life

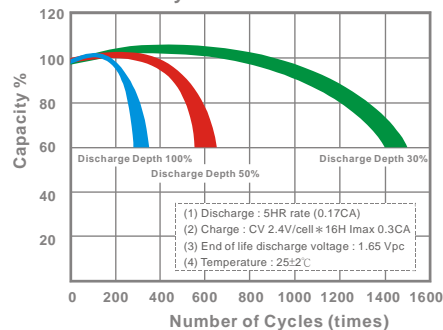

### - PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	87.6	93.9	98.6	104	110	113	116
10	min	59.9	71.4	72.9	74.1	74.8	75.6	76.3
15	min	49.4	54.4	56.1	57.3	58.1	59.6	60.6
30	min	29.8	31.6	32.5	33.6	34.0	34.2	34.8
60	min	17.2	17.9	18.6	19.0	19.2	19.3	19.5
120	min	9.72	10.2	10.4	10.7	10.7	10.8	11.0
180	min	6.95	7.17	7.33	7.46	7.51	7.55	7.65
240	min	5.42	5.69	5.87	5.93	5.96	5.99	6.01
300	min	4.60	4.72	4.80	4.87	4.91	4.94	4.96
600	min	2.76	2.79	2.83	2.86	2.89	2.98	3.00
1200	min	1.43	1.49	1.53	1.56	1.59	1.60	1.61

### - Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	46.3	51.0	55.3	59.5	62.8	64.3	67.7
10	min	32.4	39.7	41.7	42.3	44.0	44.4	46.3
15	min	26.7	30.2	32.1	32.3	33.8	34.7	36.3
30	min	16.1	17.5	18.6	19.7	20.6	20.8	21.8
60	min	8.80	9.22	9.56	9.83	10.0	10.1	10.1
120	min	4.74	4.95	5.07	5.19	5.22	5.28	5.51
180	min	3.48	3.57	3.65	3.71	3.73	3.77	3.83
240	min	2.69	2.74	2.81	2.87	2.89	2.94	2.99
300	min	2.34	2.39	2.42	2.45	2.46	2.48	2.50
600	min	1.23	1.29	1.34	1.37	1.38	1.39	1.40
1200	min	0.692	0.741	0.750	0.756	0.758	0.761	0.764

All data on the spec. sheet is an average value:

The tolerance range : X<6min (+15%~-15%), 6min≤X<10min (+12%~-12%), 10min≤X<60min (+8%~-8%), X≥60min (+5%~-5%)